



The L-3 DP&CS NMS6000 modular platform provides the latest in advanced vessel controls. Each system can be custom tailored to meet customer requirements, ranging from entry level Alarm and Monitoring Systems (AMS) to complex Vessel Monitoring Systems (VMS).

Some of the key systems features are:

- Main engines and generators
- Thrusters and auxiliaries
- Pump and valve controls
- Power management
- Bilge and ballast controls
- Material handling including fuel, air, water, mud and dry bulk materials
- Environmental conditions and vessel motions

These systems offer unlimited flexibility to interface with vessel systems such as bilge and ballast, cargo control and major machinery monitoring including propulsion and switchgear, which provides both monitoring and control capabilities. Each installation is custom designed to meet specific vessel requirements. Mimic diagrams for each system monitored provide simple and intuitive user interaction. Watch Call and Patrolman alarm systems can easily be incorporated within the system. NMS6000 AMS/VMS systems can be designed to meet a variety of certifications ranging from simple automation systems to vessel certified for unmanned engine room operations. NMS6000 systems are in use in a wide range of applications from standard offshore support vessels to large drilling assets and even in land-based applications.

NMS6000 VESSEL MONITORING SYSTEM





The Benefits

- Latest type-approved industry standard hardware – Active Matrix TFT LCD displays with touch screen and available integrated PCs provide high levels of performance, reliability and supportability
- Flexible and scalable – Commercial-off-the-shelf hardware and software platforms provide a system that can be supplied at the appropriate level to meet current requirements but still be easily adapted to growing customer needs
- Network/server architecture – Using Windows XP Server OS allows remote control and monitoring stations to be strategically placed throughout the vessel
- Distributed control – Minimizes long cable runs, reducing shipboard cable costs and improving reliability
- Integrated system – Standard network protocols including ModBus, RS232, RS422, RS485 allow data from a wide range of other manufacturers' systems to be easily integrated into the NMS6000
- Flexible installation – A variety of hardware options are available, ranging from components for mounting in existing consoles to complete console arrangements custom designed by L-3 DP&CS
- Regulatory compliance – NMS6000 systems meet all appropriate regulatory requirements



Workstation Components

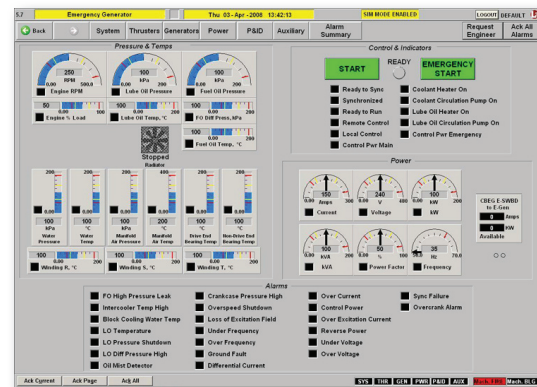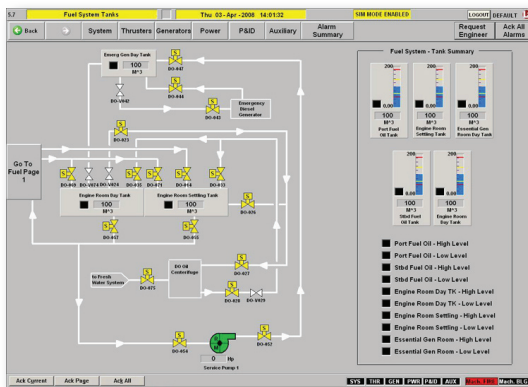

Dedicated Displays for Each Monitored System

Locations Worldwide

California, USA

12131 Community Road, Poway, California 92064, Tel: +1 858.679.5500, Fax: +1 858.679.5501

Texas, USA

6610 W. Sam Houston Pkwy N, Suite 300, Houston, Texas 77041, Tel: +1 713.880.2866, Fax: +1 713.880.2734

Singapore

No 1 Science Park Road, The Capricorn 01-01/04, Singapore 117528, Tel: +65 6333.8119, Fax: +65 6333.8114

Brazil - L-3 Marine & Offshore Brasil Ltda.

Jonas Lobo, Mobile: +55 21 8104-4100; Daniel Tedesco, Mobile: +55 21 8104-5355

www.l-3com.com/dpcs/



**Dynamic Positioning
& Control Systems**

This technical data and software are considered as Technology Software Publicly Available (TSPA) as defined in Export Administration (EAR) Part 734.7-11. Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice at L-3 Communications' discretion. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.